


## Removing and installing front door trim panel

### Special tools and workshop equipment required

- ♦ Removing pliers -VAS 3392-

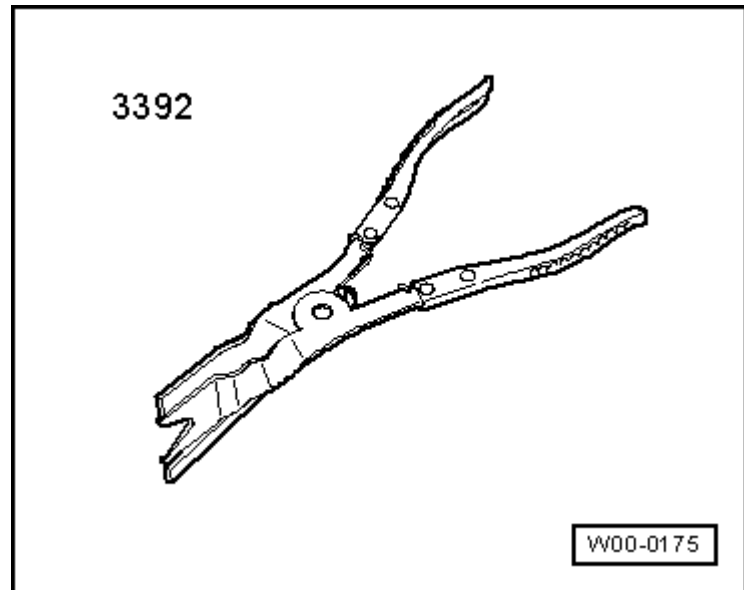

- Remove window winder handle -1- by pushing up plastic circlip at rear of handle.
- Remove plastic surround -2- by twisting anti-clockwise and pulling off.
- Remove plastic trim insert -3- by prying off with small screwdriver at edge nearest to handle.
- Remove plastic surround -4- by removing Phillips head screw situated behind plastic trim insert -3-.
- Remove grab handle -5- by removing Phillips head screws -arrows-.
- Pry off door panel -6- around outer edges using Removing pliers -VAS 3392-
- Disconnect speaker wires from speaker.
- Install in reverse order.

